

**Serie | 6, Wall-mounted canopy
rangehood, 90 cm, Stainless steel
DWB98JR50A**



**The wall-mounted chimney hood: mount it
on the wall, giving you complete freedom in
your kitchen planning.**

- With exhaust, the air is cleaned by a grease filter and then ducted to the outside which ensures optimal kitchen air quality
- **Intensive speed setting with reset:** automatically resets the hood to normal speed setting after 6 min..
- **LED lighting:** for perfect, energy-efficient illumination of the cooktop.
- **Extra silent:** maximal extractor performance with very minimal noise.
- **Intensive speed setting:** removes strong kitchen odours especially quickly and effectively.

Technical Data

Typology :	Chimney
Approval certificates :	Australia Standards, VDE
Length electrical supply cord (cm) :	130
Height of the chimney (mm) :	582-908/568-1018
Height of product, without chimney (mm) :	46
Minimum distance above an electric hob :	550
Minimum distance above a gas hob :	650
Net weight (kg) :	20.727
Type of control :	Electronic
Number of speed settings :	3-stage + 2 intensive
Maximum output air extraction (m ³ /h) :	430
Boost position output recirculating (m ³ /h) :	457
Maximum output recirculating air (m ³ /h) :	353
Boost position air extraction (m ³ /h) :	843
Number of lights :	3
Noise level (dB) :	55
Diameter of air outlet (mm) :	120 / 150
Grease filter material :	Washable stainless steel
EAN code :	4242005107735
Connection Rating (W) :	165
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50; 60
Plug type :	AU plug
Installation typology :	Wall-mounted



Serie | 6, Wall-mounted canopy rangehood, 90 cm, Stainless steel DWB98JR50A

**The wall-mounted chimney hood: mount it
on the wall, giving you complete freedom in
your kitchen planning.**

Design

- For Wall mounted installation
- TouchControl with lightline

Performance

- 3-stage + 2 intensive
- Extraction rate according to EN 61591:
Min: 273.2 m³/h
Intensive: 843 m³/h
- Noise min./max. Normal Level: 46/55 dB*
- Noise level in recirculation mode:
Max. normal use: 69 dB(A) re 1 pW


Comfort & Convenience

- EcoSilence Drive BLDC motor
- with one-way flap
- Dishwasher safe metal grease filters
- 6 min.
- Additional noise insulation

Technical Information

- Suitable for ducted or recirculating operation
- For recirculated extraction optional Recirc. kit or clean air kit (accessory) needed
- Appliance (ducted air): 614-954 x 898 x 500 mm
- Dimensions exhaust air (HxWxD): 614-954 x 898 x 500 mm
- Dimensions recirculating (HxWxD): 614-1064 x 898 x 500 mm
- Dimensions recirculating with cleanAir module (HxWxD);
689 x 898 x 500 mm - mounting with outer chimney
795-1139 x 898 x 500 mm - mounting with telescopic chimney
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- 165 W total connected load
- Electrical cable length 1.3 m

**Serie | 6, Wall-mounted canopy rangehood,
90 cm, Stainless steel
DWB98JR50A**

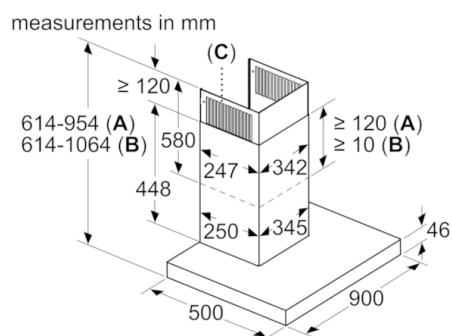

A: Air extraction
B: Air recirculation
C: Air outlet – slots for exhaust air to be mounted facing down

