

**Serie | 8, Wall-mounted canopy
rangehood, 90 cm, clear glass black
printed
DWK98PR60B**



**Inclined hood: optimal for keeping an eye
on your pots and pans.**

- **Cooktop-based hood control:** Convenient control of rangehood functions via the cooktop.
- **Extra silent:** maximal extractor performance with very minimal noise.
- **PerfectAir sensor:** automatic control of settings for maximal extractor performance with minimal noise.
- **Intensive speed setting:** removes strong kitchen odours especially quickly and effectively.
- **Home Connect:** Connected home appliances for an easier everyday life (only in countries where Home Connect service is available).

Technical Data

Typology :	Chimney
Approval certificates :	CE, VDE
Length electrical supply cord (cm) :	130
Height of product, without chimney (mm) :	323
Minimum distance above an electric hob :	450
Minimum distance above a gas hob :	650
Net weight (kg) :	20.701
Type of control :	Electronic
Number of speed settings :	3-stage + 2 intensive
Maximum output air extraction (m ³ /h) :	468
Boost position output recirculating (m ³ /h) :	460
Maximum output recirculating air (m ³ /h) :	378
Boost position air extraction (m ³ /h) :	837
Number of lights :	2
Noise level (dB) :	55
Diameter of air outlet (mm) :	120 / 150
Grease filter material :	Washable aluminium
EAN code :	4242002966748
Connection Rating (W) :	166
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50; 60
Plug type :	GB plug
Installation typology :	Wall-mounted



4 242002 966748

Serie | 8, Wall-mounted canopy rangehood, 90 cm, clear glass black printed DWK98PR60B

**Inclined hood: optimal for keeping an eye on
your pots and pans.**

Performance

- 3-stage + 2 intensive
- Extraction rate according to EN 61591:
Min: 293 m³/h
Intensive: 837 m³/h

Design

- Appliance colour: Stainless steel
- TouchControl with lightline



Convenience

- Automatic run on for 10 min.
- SoftLight with light dimming function
- Saturation indicator for metal & carbon filters
- EfficientDrive brushless motor
- Light Intensity: 519 lux
- Colour Temperature: 3500 K
- Rim ventilation
- Metal grease filters with black glass cover
- Additional noise insulation
- Dishwasher safe metal grease filters


Technical Information

- For Wall mounted installation
- Suitable for ducted or recirculating operation
- Dimensions recirculating with CleanAir module (HxWxD):
1147 x 894 x 548 mm - mounting with outer chimney
1217-1487 x 894 x 548 mm - mounting with telescopic chimney
- Dimensions exhaust air (HxWxD): 957-1227 x 894 x 548 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- 166 W total connected load


**Serie | 8, Wall-mounted canopy rangehood,
90 cm, clear glass black printed
DWK98PR60B**

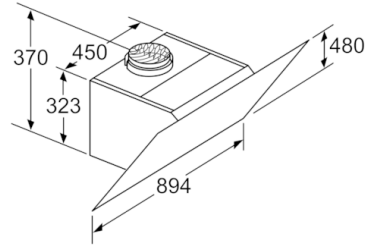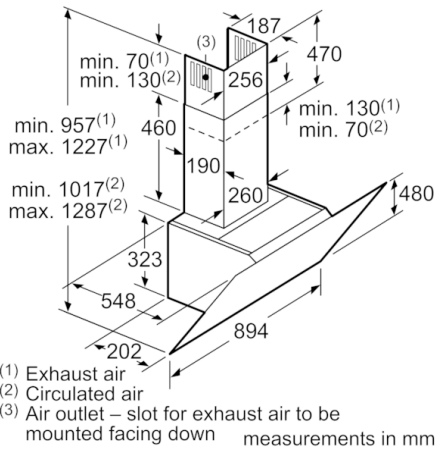

Appliance in circulated air mode
without duct
Circulated air set required
measurements in mm

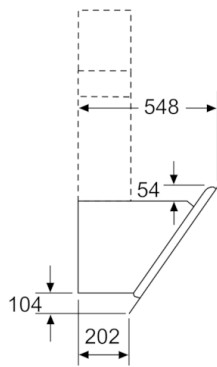

measurements in mm

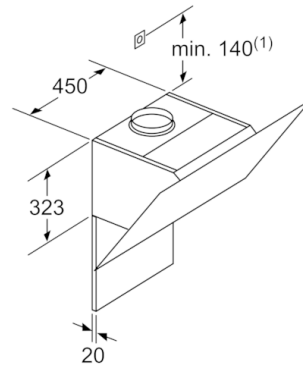

(1) Position of socket

Note the maximum thickness of the back panel.
measurements in mm

