


Description: **Robinhood Compact Canopy**

Model Numbers: RCA2AI6WH, RCA2AI6SS, RCA2AI9SS, RCA2AI9WH

Typical design

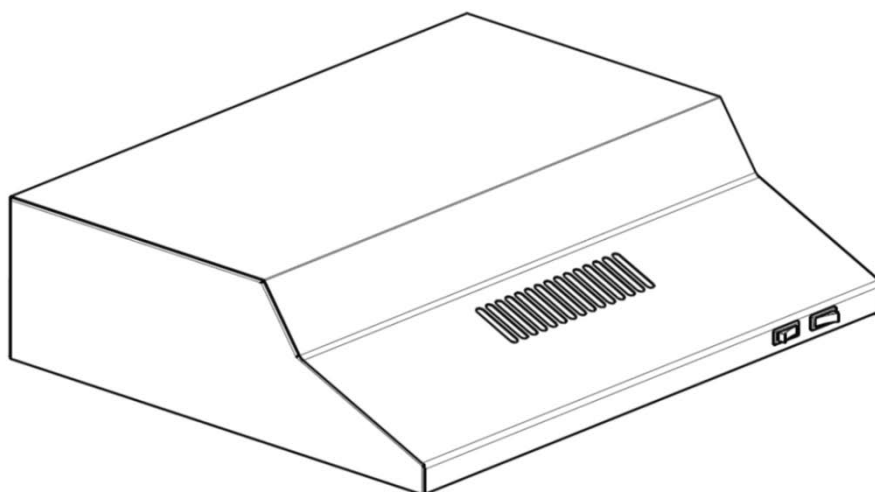

Features and Benefits

o High performance extraction fan

High performance extraction fan rapidly removes steam, smoke and cooking smells from your kitchen. Three speed switch lets you select the fan strength you need: half strength for steamed vegetables; full strength for stir fries.

o Incandescent lamp

40 watt incandescent lamp illuminates entire cooking surface. Lamps are quick and easy to replace.

o Multi-layered micromesh filters

Multi-layered micromesh filters effectively trap grease. They're simple to remove and are easily maintained with a regular clean in the dishwasher.

o Rectilinear design

Simple styling makes cleaning easy. High quality stainless steel or powder coated steel and the fingertip controls are easy to clean with a damp cloth.

o Thermal overload switch

Thermal overload function that senses extreme heat and disconnects power to the motor temporarily. If you have a cooking disaster, and something catches fire, the rangehood automatically switches off to prevent flames and sparks being sucked into the ducting or ceiling.

o Recirculation or ducted option

This rangehood is pre-set as recirculation mode with charcoal filters installed. However, it also can be ducted if required.

Specifications

Technical data

Motor type	2 speed axial motor
Lamp	1*40W incandescent lamp
Gauge of Steel	0.6mm
Type of steel	Panel steel
Finish of steel (VO61SS80)	Powder coated in white
Voltage	230-240V. 50 Hertz
Power	160 Watt max
Electrical approval	AS3310-1992
Performance tested to	IEC61591
Filter	Charcoal filter
Length of power cord	1200mm
Ducting outlet	285*75mm top or rear
Recirculation or ducted	Both

	RCA2AI6WH & RCA2AI6SS	RCA2AI9WH & RCA2AI9SS
Gross weight	7.0kg	8.5kg
Carton dimensions	520*180*610mm	520*180*910mm
Carton volume	0.057 m ³	0.085 m ³
Rangehood dimensions	490*152*597mm	490*152*897mm

Performance data

RCA2AI6WH & RCA2AI6SS; RCA2AI9WH & RCA2AI9SS			
Power level 1	200 m ³ /hr	Noise level 1	55 dB
Power level 2	300 m ³ /hr	Noise level 2	60 dB

New Zealand
Monaco Corporation Ltd
Telephone: (09) 415 6000
Facsimile: (09) 415 7400
Email: enquiries@robinhood.co.nz
www.robinhood.co.nz

Australia
Shriro Australia Pty Ltd
ABN 28 002 386 129
Telephone: 1800 648 556
Facsimile: 1800 628 577
Email: enquiries@robinhood.com.au
www.robinhood.com.au

